

# Tektronix Logic Analyzer Probes

## P5900 Series Datasheet



### Key features

- Low total capacitive loading minimizes intrusion on circuits
- 20 k $\Omega$  input resistance
- 7.5 V<sub>p-p</sub> dynamic range supports a broad range of logic families
- Variety of attachment mechanisms including the high-density D-Max®, Mictor, square pins, and flying leads.

### Applications

- Digital hardware validation and debug
- Monitoring, measurement, and optimization of digital hardware performance
- Embedded software integration, debug, and verification

### Leading probe solutions for real-time digital systems analysis – P5900 series probes

No test and measurement solution is complete without probing and the consideration of its impact on your system and your measurement time. With the industry's lowest probe loading, the P5900 Series logic analyzer probes protect the integrity of your signal - minimizing the impact on your design. The P5900 Series logic analyzer probes when used with TLA6400 Series logic analyzers make sophisticated logic analysis available at an affordable price. Select from a variety of attachment mechanisms, including the high-density D-Max®, Mictor, and general-purpose.

Verification and debug of today's high speed digital signals requires probing solutions that can accurately acquire from a wide variety of electronic designs and protect signal fidelity. Tektronix logic analyzer probes contain a variety of connectivity options that are engineered to ensure that signal acquisition is a true reflection of your design's performance.

### Notice to EU customers

This product is not updated to comply with the RoHS 2 Directive 2011/65/EU and will not be shipped to the EU. Customers may be able to purchase products from inventory that were placed on the EU market prior to July 22, 2017 until supplies are depleted. Tektronix is committed to helping you with your solution needs. Please contact your local sales representative for further assistance or to determine if alternative product(s) are available. Tektronix will continue service to the end of worldwide support life.



P5910 17-channel general purpose probe

## 日图简介

深圳市日图科技有限公司（简称“日图科技”）创始于2004年，核心业务是为国内企业提供测试设备及相关器材的供应服务，公司客户涵盖制造、科研、教育、电力、能源、通信等众多领域。创业至今，日图科技已经成为国内仪器仪表行业中最大的综合服务供应商之一，日图科技作为行内的领先者，有着高效的供应服务体系，并拥有一支专业的、高素质的服务团队。

目前，日图科技已在深圳、上海、广州、苏州、重庆、杭州、西安、香港等国内电子工业发达地区设立了办事与服务机构，并通过日图科技在全国各地的经销网络，为广大客户提供优质的本地化服务。

日图科技一贯秉承“专业、规范、诚信立业、日日图新”的宗旨，并在实践中不断提升公司的服务能力，为客户提供专业、高效、全面、经济的优质供应服务，顾客满意是日图科技永远追求的目标。

## 合作伙伴




## 优势服务

- (1) 产品选型
- (2) 测试解决方案
- (3) 免费测试服务
- (4) 代办计量校准
- (5) 维修维护
- (6) 技术培训
- (7) 物流配送
- (8) 常备应急库存




The 17-channel P5910 provides flexible general-purpose probing, with support for 0.100 in. and 2 mm pin spacing, low input capacitance, and accessories for connecting to many industry-standard connections.

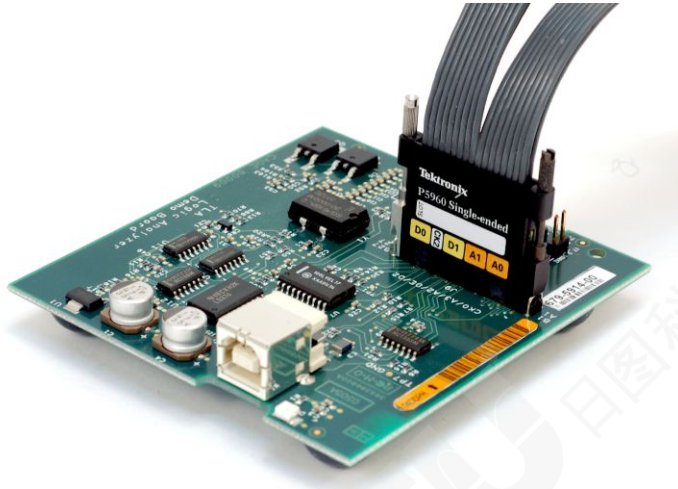

P5960 34-channel D-Max probe

For applications where circuit board space is limited, the 34-channel high-density P5960 D-Max offers the smallest available footprint and a quick connection mechanism.

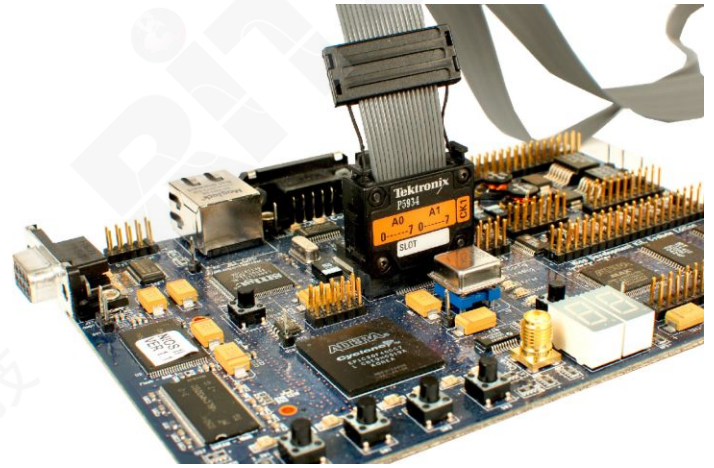

P5934 34-channel Mictor probe

The P5934 is 34-channel mictor probe with quick connect/disconnect and a positive-latching mechanism to ensure a secure, reliable connection.

## Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

Compatible with TLA6400 series logic analyzers

	P5910	P5934	P5960
Probe type	Single-ended Data Single-ended Clock (General purpose)	Single-ended Data Single-ended Clock (Mictor 34-channel)	Single-ended Data Single-ended Clock (D-Max® Probing Technology)
Number of channels	17	34	34
Recommended use	Most general-purpose applications	Applications requiring many channels to be connected quickly in a small footprint	High-performance applications requiring many channels to be connected quickly in a small footprint
Attachment to target system	Fits both 0.100 in. and 2 mm square pin configurations	Amp Mictor 34-channel connector	D-Max® probing technology compression cLGA

## P5900 probe specifications

Input resistance 20 k $\Omega$  to ground, typical

### Input capacitance

P5910	1.3 pF
P5934	2.0 pF
P5960	0.8 pF

Minimum digital swing 300 mV

Analog bandwidth <sup>1</sup> 2 GHz

### Cable length

P5910	1.5 m (5 ft.)
P5934	1.2 m (4 ft.)
P5960	1.5 m (5 ft.)

## Ordering information

Model	Description
P5910	17-channel General-purpose probe with single-ended Data/Clock, separable podlets, and accessories <b>Includes</b> : podlet holders, IC grabbers, ground leads, ground tips, extension ground tips, probe labels
P5934	34-channel high-density Mictor probe with single-ended Data/Clock and accessories <b>Includes</b> : latch housing assembly (edge-mount), latch housing assembly (vertical), probe labels
P5960	34-channel high-density D-Max <sup>®</sup> Probing Technology Probe with single-ended Data/Clock and accessories <b>Includes</b> : probe head protective cover, probe retention kit for D-Max <sup>®</sup> Probing Technology, probe labels

## Probe options

### Language options

Opt. L0	English manual
Opt. L99	No manual

<sup>1</sup> Analog bandwidth of P6960 is less with the flying lead set attached.

## Service options

Customers who choose a Tektronix product receive a support partnership focused on making the deployment and operation of their products successful. Tektronix support teams are committed to providing rapid response. A broad range of flexible services is available at the time of product purchase to meet customer service needs.

The following service options are offered for the P5900 logic analyzer probes.

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)

## Standard accessories

### P5910

335-2736-xx	Sheet of probe labels
020-2662-xx	Probe accessory kit provides different means to connect the logic analyzer probe to the SUT.

### P5934

335-2738-xx	Sheet of probe labels
105-1088-xx	Latch housing assembly, edge-mount
105-1089-xx	Latch housing assembly, vertical

### P5960

335-2737-xx	Sheet of probe labels
020-2908-xx	Probe retention kit for D-Max <sup>®</sup> Probing Technology (contains 2 retention shrouds)

## Recommended accessories

### P5910

020-2622-xx	Probe accessory kit provides different means to connect the logic analyzer probe to the SUT
020-2711-xx (20 included)	20 Extension ground tips
131-5638-xx (20 included)	Probe tip
020-2733-xx (20 included)	IC grabber
020-2712-xx (8 included)	3-inch ground lead set
020-2713-xx (2 included)	8-inch ground lead set
352-1115-xx (2 included)	Probe grouper

### P5934

131-6134-xx	AMP Mictor Connector, Surface-Mount
020-2228-xx (21 included)	AMP Mictor Connector, Surface-Mount
020-2456-xx	Compression-on-PCB to Mictor Adapter, 34 channel

**P5960**

**020-2910-xx (50 included)**

Probe retention kit for D-Max® Probing Technology

**020-2539-xx**

Post-style probe retention kit for D-Max® Probing Technology



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



日图抖音号



日图公众号

### 深圳总部

深圳市南山区留仙大道南山云谷创新产业园二期 6 栋一楼东座  
电话：0755-83680722(8 线)

### 上海分公司

上海市闵行区中春路 8633 弄万科七宝国际 26 幢 701 室  
电话：021-33888891/3/5  
手机：13564654980

### 广州分公司

广州市科学城科学大道中 97 号科汇金谷 J 栋东座 808 室  
电话：020-31604020  
手机：18027340836

### 西安分公司

陕西省西安市雁塔区长安中路南飞鸿广场 3 号楼 1813 室  
手机：15529365365

### 杭州分公司

浙江省杭州市萧山区盈丰街道鸿宁路 1819 号左右世界1幢 1 单元 702-3  
电话：0571-86856181  
手机：18668225058

### 重庆分公司

重庆市观音桥茂业东方时代大厦 35 楼 3509 室  
电话：023-67904187  
手机：13896060852

### 苏州分公司

苏州苏州工业园区科营路 2 号中新生态大厦 10 楼 1010 室  
电话：0512-62515781、0512-62515784  
手机：15895400640

### 香港分公司

香港新界元朗屏厦村厦村路 DD125 段 1215-1217lot  
电话：+852-24932683

## 深圳市日图科技有限公司

SHENZHEN RITU SCIENCE TECHNOLOGY CO.,LTD

www.rituchina.com

400-616-5217

广东省深圳市南山区留仙大道南山云谷创新产业园二期 6 栋一楼东座

① 如需所有最新配套资料，请立即与日图科技各地分公司联系。